


University of Wisconsin Eau Claire-Barron County

Library - HVAC Upgrades Projects – Phase 2

CLARIFICATIONS:

1. Pneumatic Valve Replacement: Scope Item #1 pneumatic valve replacement is not included in the Phase 2 project scope. This work is already under contract to be completed before the HVAC equipment upgrades.
2. All HVAC contractors bidding on Phase 2 to include all electrical and BAS control scope to provide a fully operational HVAC system. (Ahern is the controls contractor awarded Phase 1(valve replacement) project).
3. Bidding contractors are responsible for performing any structural review required for the placement of the Dx air cooled condensing unit on the roof. The roof structure is a precast concrete roof 5-J-5 @ 2'-0" o.c.

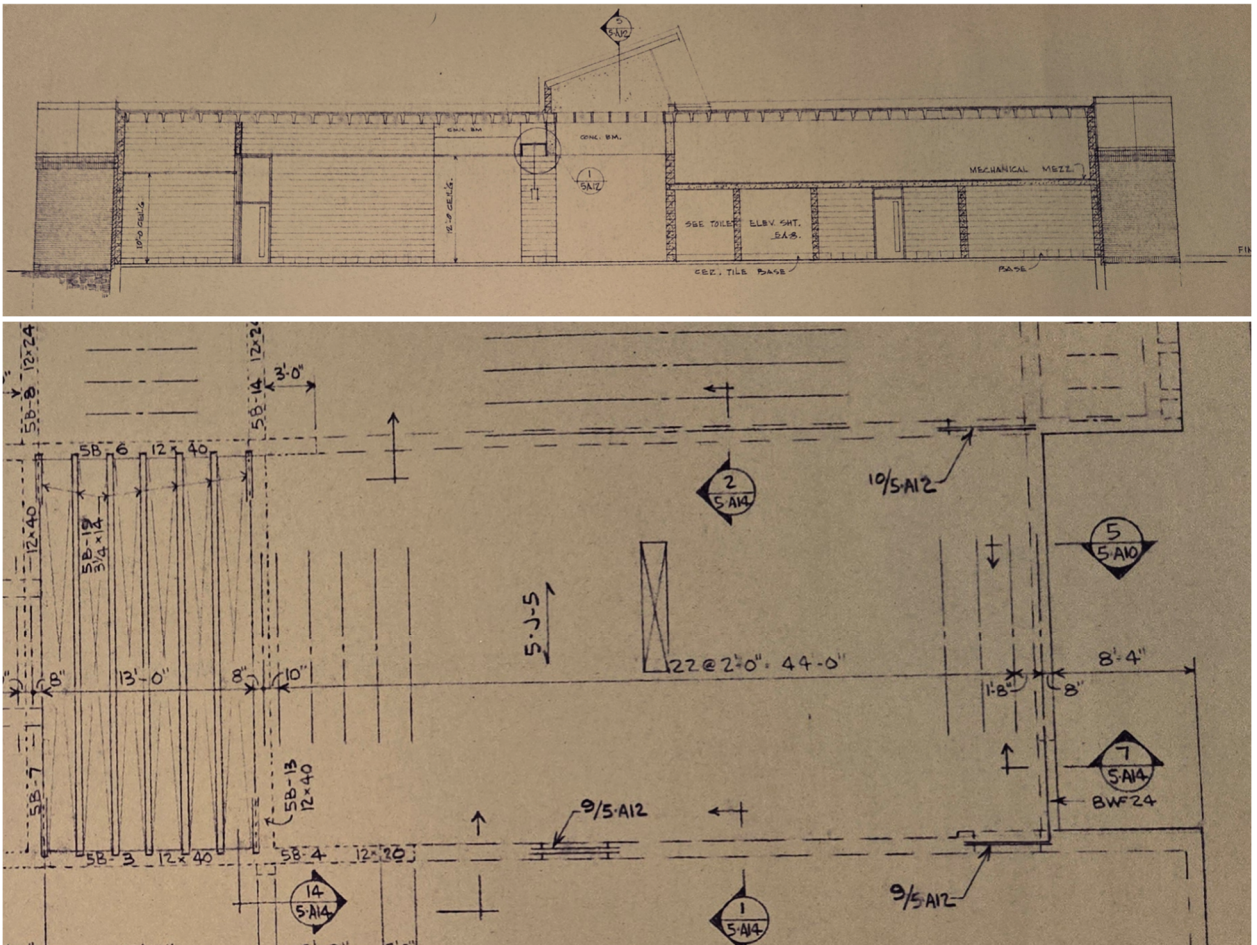

4. AHU-1 Controls & Sequence of Operations: All HVAC equipment to be monitored and controlled by Distech controls. All existing Honeywell controls to be removed

